



**Power supply  
115 VAC / 24 VDC  
for UC112 and CN110**

**Description**

- Transformer, filtered, waterproof IP 67 (without connectors), class II
- Power : 110 W at 24VDC

**Technical characteristics**

Input	Output
<ul style="list-style-type: none"> <li>• 115 VAC +/- 10%</li> <li>• Cable 2 poles + ground 3 x 1 mm<sup>2</sup>,</li> <li>• Thermal fuse : 130 °C</li> <li>• Cord length : 2.0 m</li> <li>• US plug</li> </ul>	<ul style="list-style-type: none"> <li>• Voltage no load : 30.0 V DC</li> <li>• 40% charge : 24.0 V DC, 1.8 A</li> <li>• 50% charge : 22.0 V DC, 2.3 A</li> <li>• 75% charge : 21.6 V DC, 3.4 A</li> <li>• 100% charge : 21.2 V DC, 4.6 A</li> <li>• Cord length : 2.7 m (0 , -10%)</li> <li>• Output cable (3 x 1 mm<sup>2</sup>) with DIN 45 321 female connector, 3 points</li> </ul>

**Dimension**

- l x h x w : 133 x 88 x 100 mm

**Weight**


- 3.6 kg

**Conforms to**

- EN 60742 / EN 61558-2-6

**Reference**

SEUC005/38 : 115VAC – 24VDC power supply (US plug)

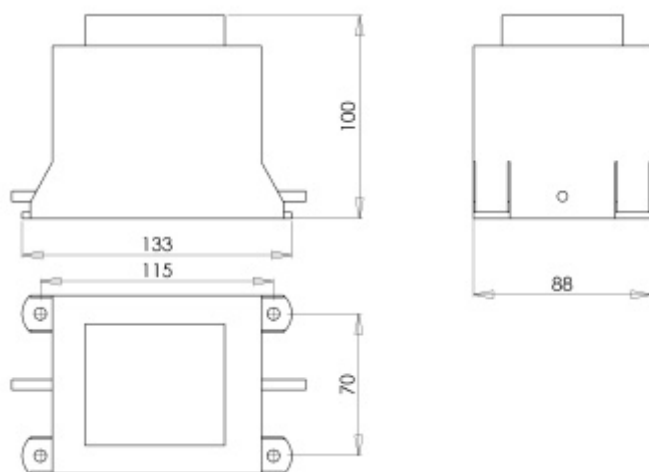

US plug