



Height Adjustment System CHR312

for CN312Cr and CN312Sr marking head



Use

- ▶ The height adjustment system (CHR) allow the marking head to move on +/- 22.5 mm (total course = 45 mm).
- ▶ A locking nut and a dual lateral locking screw fix the position of the Z height.


Advantages

- 1 – Fine adjustment : 1 turn of the adjusting screw = 1.75 mm
- 2 – Dovetail guide with large bearing surface design for the constraints of :
 - ▶ integration
 - ▶ use
- 3 – Specially designed for scribing marking head.

Installation

The CHR is placed between the marking head and the support where is integrated the CN312Cr or CN312Sr :

- ▶ Mounted to the head with 4 CHc M6x16 screws (delivered with the CHR)
- ▶ Aligned to the head using two 8mm diameter locating pins
- ▶ Mounted to the support with:
 - 4 CHc M8 screws (not supplied)
 - or 4 FHc M6 screws (not supplied)

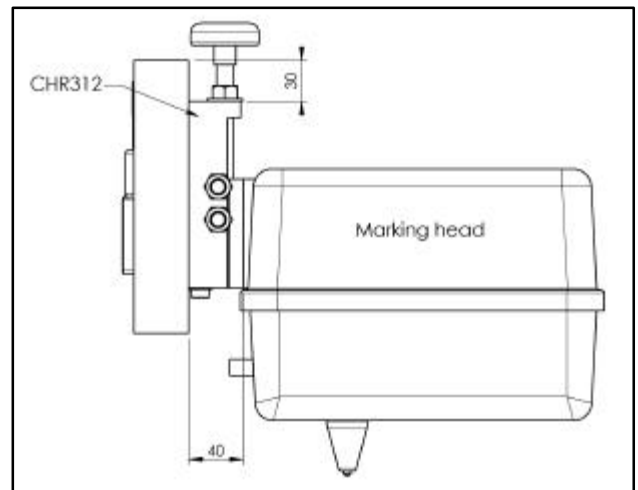

Weight

5 Kg

Reference

SEOP013/182 : Height adjustment system CHR312 (Scribing)

Plan

