

## Use

- The height adjustment system (CHR) allow the marking head CN110 to move on +/- 22.5 mm (total course = 45 mm).
- A locking nut and a lateral locking screw fix the position of the Z height.


## Advantages

- 1 – Fine adjustment : 1 turn of the adjusting screw = 1.5 mm
- 2 – Dovetail guide with large bearing surface design for the constraints of :
  - integration
  - use
- 3 – Specially designed for the CN110

## Installation

The CHR is placed between the marking head and the support where is integrated the CN110 :

- Mounted to the head with 2 FHC M6x16 screws (delivered with the CHR)
- Aligned to the head using a key in the CN110 T-slot
- Mounted to the support with :
  - 2 M8 screws (not supplied)
  - or 2 FHC M6 screws (not supplied)

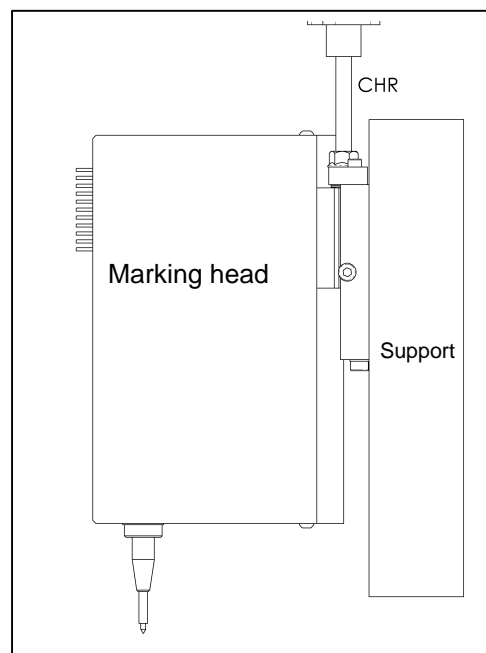


## Reference

SEOP013/155 : Height adjustment system CHR110

## Plan

See next page.

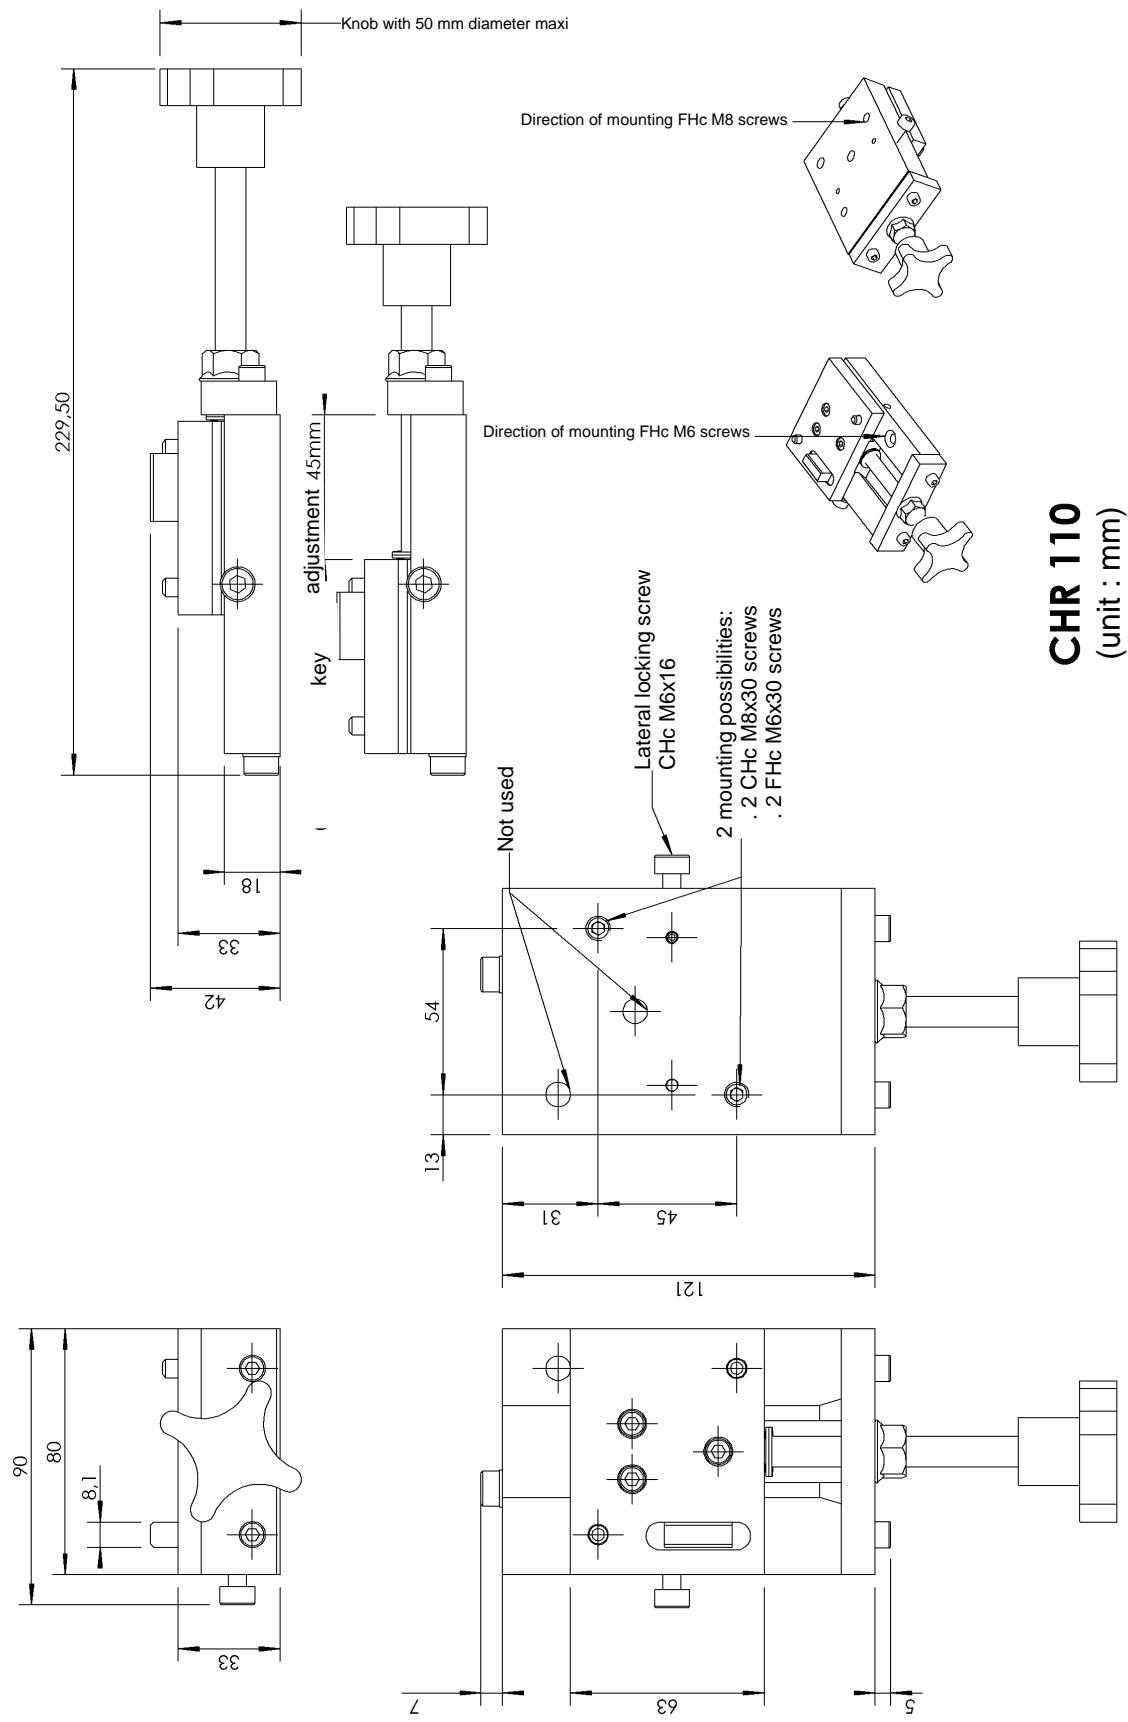

**CHR 110**  
 (unit : mm)